

The Maurer™ range of Crude Oil Sampling equipment was developed in conjunction with BP Exploration in the early 80's to meet all the criteria as laid down in ISO 3171 and related API & IP standards. The novel designs coupled with the precision machining capabilities of Maurer Instruments, resulted in this range becoming an industry standard. The legendary reliability and accuracy is well documented. (Repeatability of $\pm 5\%$ as standard)

Applications

- Fiscal Metering / Custody Transfer
- Refined Products
- Condensate Sampling
- LPG Sampling
- Crude Oil Sampling



ES11 Electric Motor Driven Cell Sampler

Sampler Operation

The sampler is essentially a power driven metering pump. The sampling mechanism is a tubular stem with an inner concentric capture tube and a piston. Each cycle first captures a precise volume of sample and then pumps it through a back pressure valve to a sample collection receiver. The ES11 sampler can be operated at a minimum of 20 grabs/min.

An additional electrical control box is required for normal operation. Please contact us for details.

The sampler installed in a correctly designed system will take representative grabs of sample at a pre-determined rate normally relative to the pipeline flow rate. The composite of the 1,000 to 10,000 grabs collected during a pipeline transfer provides a representative sample of the oil batch, for lab analysis and reference. The rate of the sampler is normally controlled by a flow computer which measures flow in the main export pipeline.

Revision 03/2018



MAURER INSTRUMENTS

ES11 Cell Sampler

Product Configurator

ES11	Electric Motor Driven Cell Sampler	Model Code
316	316 Stainless Steel	Material Wetted Parts
O	For other options please contact us	
1	Grab volume 1.0 cc	Grab Volume
B26	Cell sampler bore 1"	Cell Bore Size
B40	Cell sampler bore 1.5"	
A150	ANSI rating 150lb	ANSI Rating
A300	ANSI rating 300lb	
O	For other options please contact us	
1	Flange Size 1"	Flange Size
2	Flange Size 1.5"	
A	Atmospheric	Sampler Relief Valve
90W	90 Watts	Motor Power
230	230 Volts	Motor Voltage
G80	80:1	Gearbox Ratio
O	For other options please contact us	
1	CE	CE Compliance

ES11 316 1 B26 A300 1 A 90W 230 G80 1


Example

This sampler only works in conjunction with an additional controller (pictured below). Please contact us for more information.

Specification

Parameter	Min	Max
Fluid		
Viscosity (cSt)	-	700
Process Pressure (bar)	2	50
Process Temperature (°C)	-15	+40
Sampler		
Ambient Temperature (°C)	-15	+40
Grab Size (cc)	1	
Minimum Grab Rate	20 per minute	
Flange Size Range	1"	1.5"
ANSI Range	150	300
Weight (kg)	24	
Control Box Weight (kg)	23	
Sampler Outlet Connection	¼" NPTF	
Sampler Actuation		
Air Supply Pressure (barg)	N/A	
Air Consumption (NI/min)	N/A	
Power Supply (v)	230	
Motor Consumption (W)	90	
Connection	20mm cable gland	
Compliance		
Industry Standards	ISO 3171 - API 8.2 - IP 6.2	
CE Compliance	ATEX - 97/9/EC PED - 97/23/EC Machinery Directive - 97/37/EC	

Please contact us for alternative options

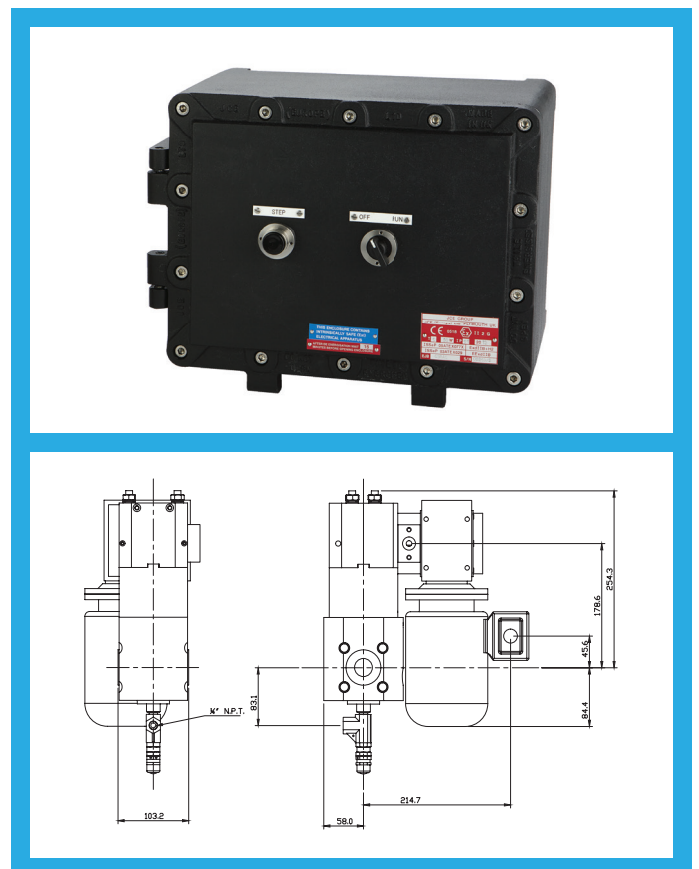

Revision 03/2018

T: +44 1353 666640
E: sales@maurerinstruments.com
W: www.maurerinstruments.com
A: Denmark House, St. Thomas Place, Ely, Cambridgeshire, CB7 4EX, UK



Oil & Gas Measurement Limited